



TYPICAL SECTION OF 5'-0" SIDEWALK

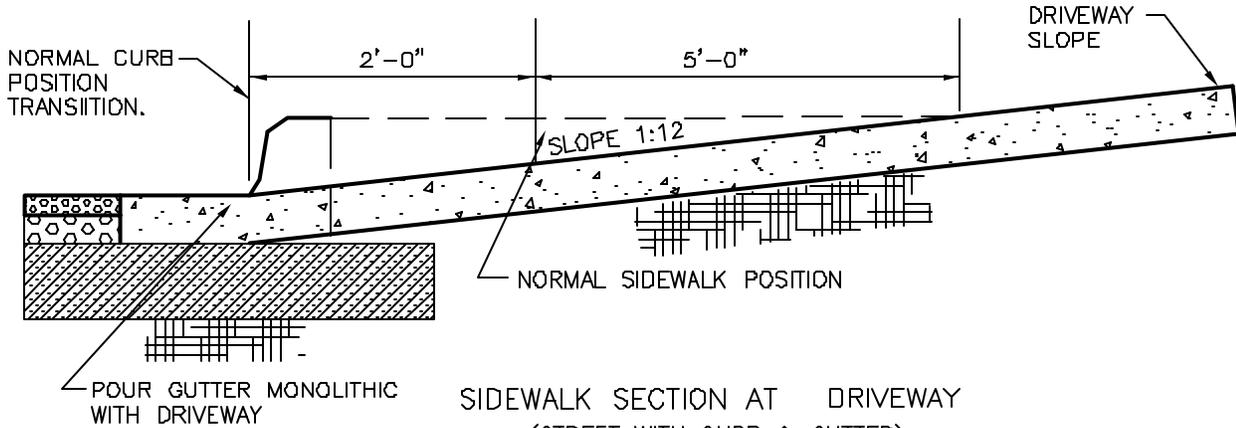


SIDEWALK SECTION AT DRIVEWAY  
(STREET WITH CURB & GUTTER)

**NOTES:**

1. 1/2" PREMOULDED EXPANSION JOINT AT DRIVEWAYS, CURBS AND AT MIN. 40'-0" O.C. HORIZONTALLY.
2. MATERIAL OF 95#/CU. FT. OR BETTER OF SELECT MATERIAL.
3. ALL EXPOSED UNPAVED AREAS TO BE COVERED WITH A STAND OF GRASS.
4. SIDEWALK TO BE CONSTRUCTED OF CLASS "A" 3000 P.S.I. CONCRETE.
5. ALL CURB CUTS AREA TO BE SAW CUT PERPENDICULAR TO CURB LINE.

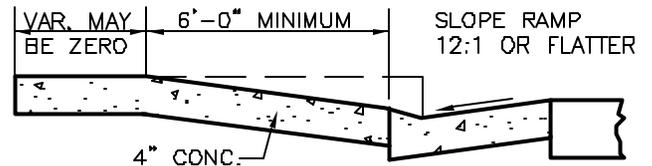


SECTION C-C

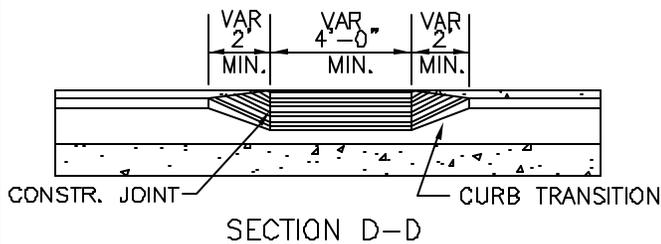

SECTION D-D

TYPICAL SIDEWALK TO CURB TRANSITION DETAILS  
(MODIFY AS NECESSARY FOR CURVE)

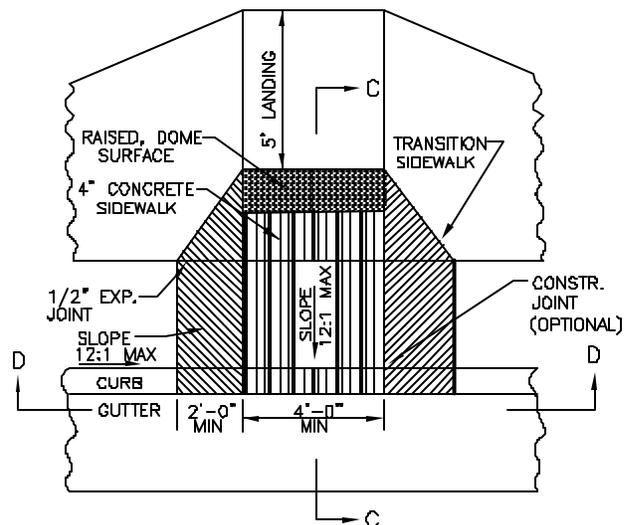

NOT TO SCALE

TYPICAL SECTION OF A 5'-0" SIDEWALK